



PROSIMPLUS APPLICATION EXAMPLE

CO₂ CAPTURE USING AN AMINE SOLUTION

EXAMPLE PURPOSE

This example presents the simulation of a CO₂ capture process from flue gas by absorption using an amine solution. The gas is first cooled in a direct contact cooler with water before to be CO₂ impoverished in an absorber (absorption column) using an amine solution. The amine is then regenerated in a desorber (distillation column) to be recycled in the absorber. The desorber gas outlet composed of CO₂ and water is then cooled and sent in a flash drum to separate water from CO₂.

This example especially illustrates the use of the ProSimPlus “Generalized balance” module for make-up amine and make-up water flowrates calculation.

ACCESS	<input checked="" type="checkbox"/> Free-Internet	<input type="checkbox"/> Restricted to ProSim clients	<input type="checkbox"/> Restricted	<input type="checkbox"/> Confidential
--------	---	---	-------------------------------------	---------------------------------------

CORRESPONDING PROSIMPLUS FILES

PSPS_EX_EN-CO2-capture-process-with-amine.pmp3

Reader is reminded that this use case is only an example and should not be used for other purposes. Although this example is based on actual case it may not be considered as typical nor are the data used always the most accurate available. ProSim shall have no responsibility or liability for damages arising out of or related to the use of the results of calculations based on this example.

TABLE OF CONTENTS

1. INTRODUCTION	3
2. PROCESS MODELING	3
2.1. Process presentation	3
2.2. Process flowsheet	4
2.3. Compounds	5
2.4. Thermodynamic model	6
2.5. Operating conditions	7
2.6. Utility consumption determination	11
2.7. Make-ups determination	17
3. SIMULATION RESULTS	20
3.1. Comments on results	20
3.2. Mass and energy balances	21
3.3. Colum profiles	22
4. REFERENCES	25

1. INTRODUCTION

This example presents a CO₂ capture process by absorption using an amine solution. The unit can be placed at a fossil fuel combustion process outlet and allow to decrease the CO₂ amount rejected in the atmosphere. In a context of environmental norms reinforcement and further to the COP21 agreements aiming at limiting the climate change, this process is one of the possible solutions to decrease CO₂ (a greenhouse gas) rejects at the outlet of the combustion units.

One of the difficulties to simulate this process is the presence of recycling, an amine make-up and a water make-up. The ProSimPlus "Generalized balance" module is used to easily calculate the make-ups.

2. PROCESS MODELING

2.1. Process presentation

CO₂ absorption:

The stream to be treated is a flue gas at 100°C and atmospheric pressure. It contains nitrogen, carbon dioxide and water. To obtain the optimal conditions for the CO₂ absorption, the gas is cooled at around 40°C through a Direct Contact Cooler (DCC) using water. It is then sent to an absorption column (absorber) to extract CO₂ using an aqueous amine solution.

Amine regeneration and recycling:


The CO₂ rich amine at the outlet of the absorber is regenerated (separated from the CO₂) in a distillation column (desorber) in order to be recycled in the absorber. To compensate the amine losses in the vapor outlets of the absorber and the desorber, an amine make-up is added to the recycling stream.

In the same way, a water make-up is required to complete the mass balance.

CO₂ recovery:

The desorber vapor outlet contains CO₂ and water. To separate these compounds, the stream is cooled and sent to a separation drum. The drum vapor outlet is mainly composed of CO₂ that will be stored and the liquid outlet is composed of water that could be recycled as make-up.

2.2. Process flowsheet

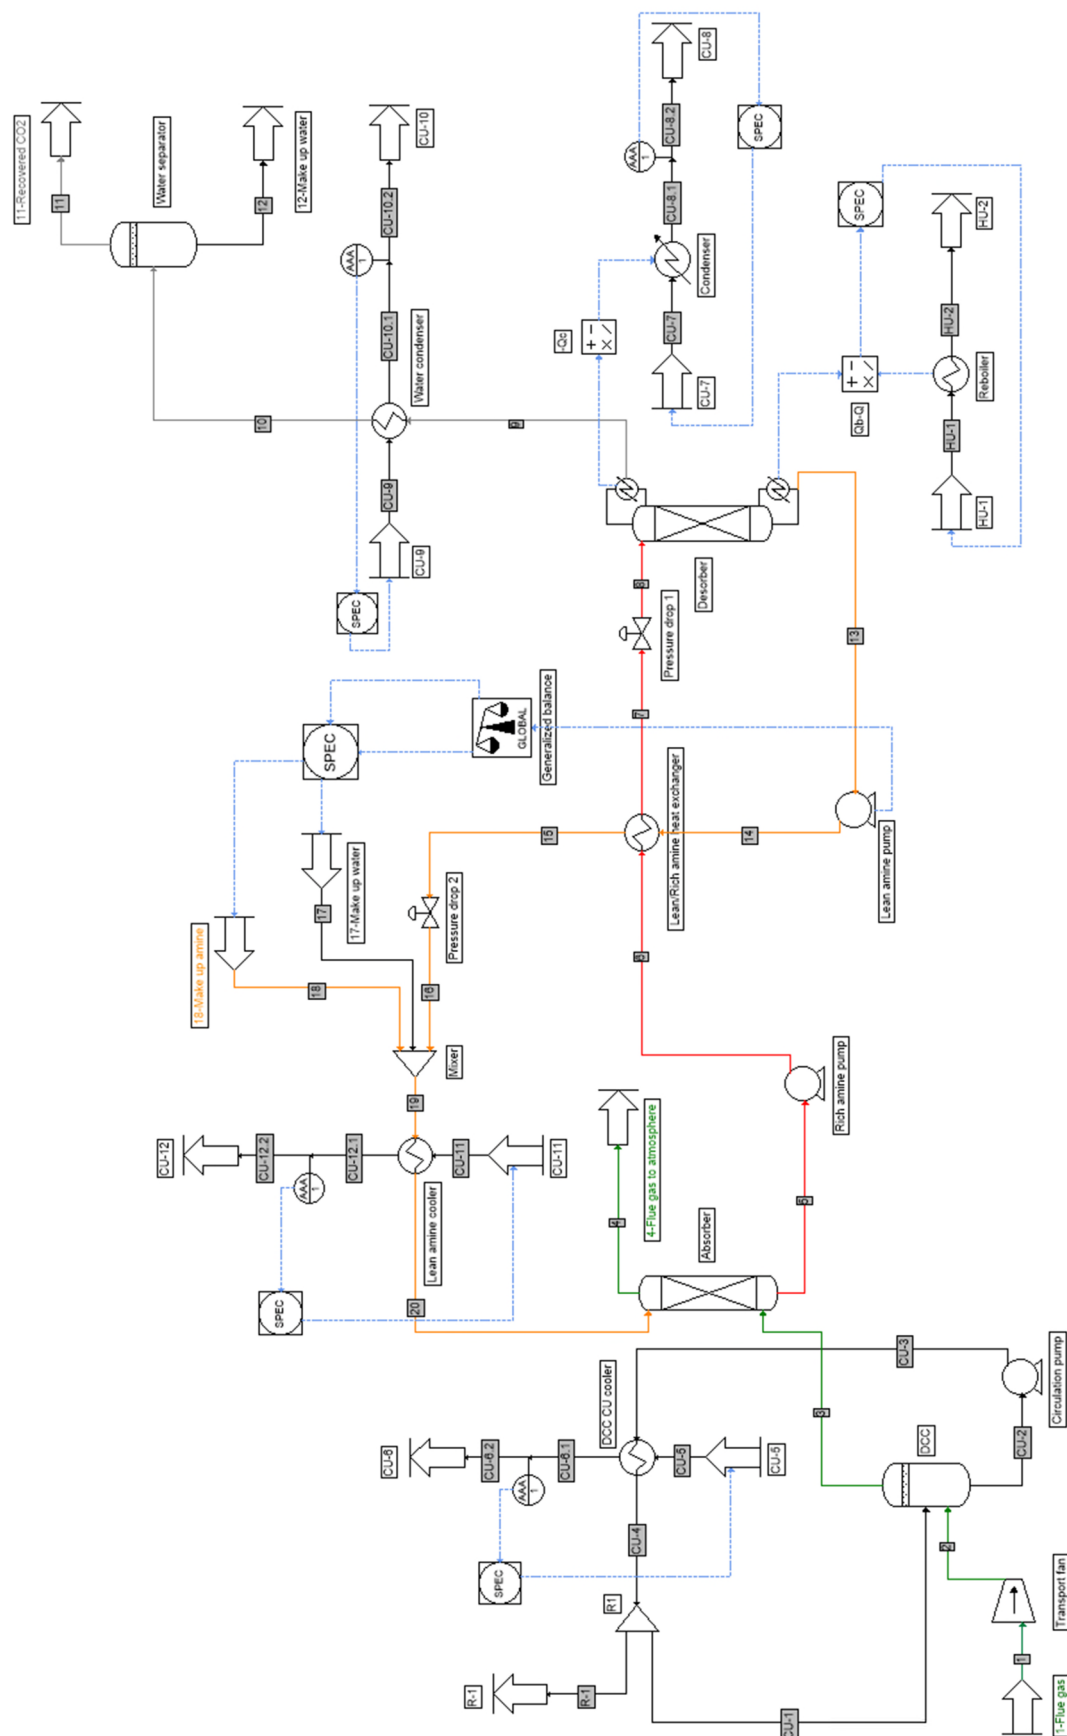

Flowsheet of the CO₂ capture unit

To improve the process flowsheet readability, the flue gas is in green, the rich amine is in red, the lean amine is in orange, the recovered CO₂ is in grey and the water is in black.

2.3. Compounds

The compounds considered in this example are listed in the table below:


Name	Chemical formulae	CAS number
Carbon dioxide	CO ₂	124-38-9
Monoethanolamine	C ₂ H ₇ NO	141-43-5
Water	H ₂ O	7732-18-5
Dinitrogen	N ₂	7727-37-9

Monoethanolamine is noted MEA in the rest of this document.

2.4. Thermodynamic model

The system considered contains an alkanolamine, CO₂ (acid gas) and water. The working pressure never exceeds 100 bars. As a consequence, the “Amine and acid gas” model has been chosen [DES81], [WEI93].

The specific thermodynamic model for water is used for the hot and cold utilities calculation (HU and CU). To use this model, the “Specific thermodynamic model for water” box has been ticked in the utility streams (HU-1, CU-5, 7, 9 and 11) as shown below:

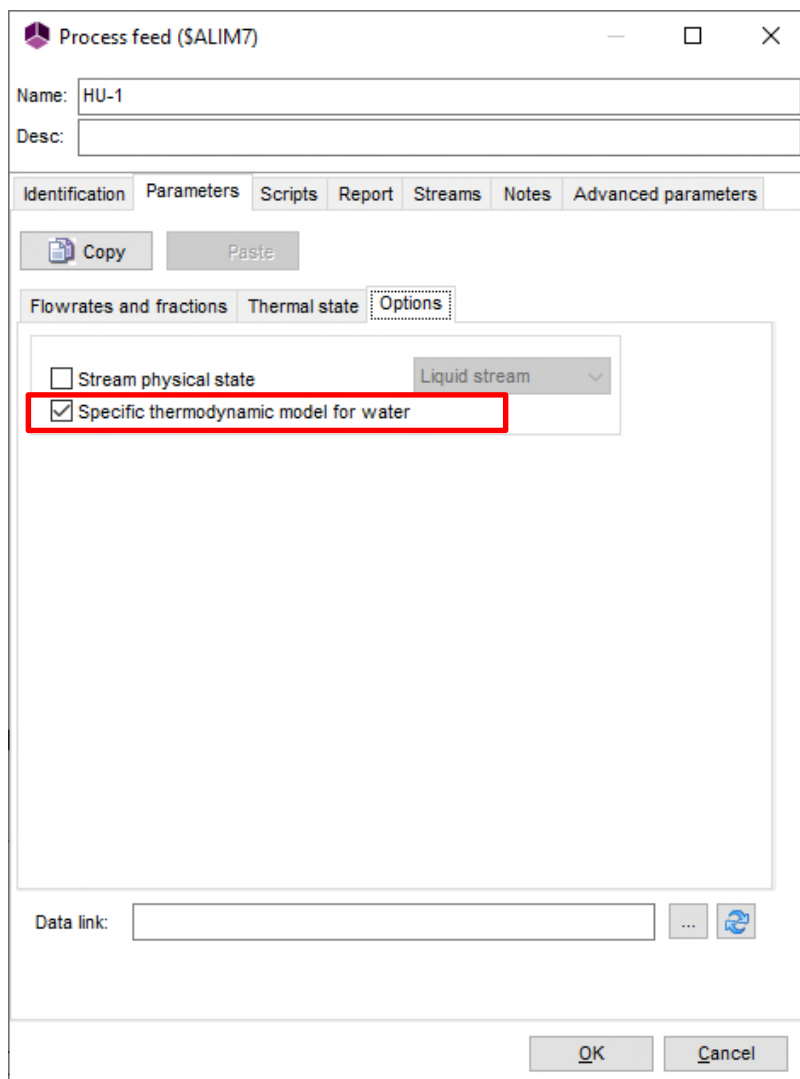

2.5. Operating conditions

A part of the data required for the elaboration of this example comes from [KAL10]. The specifications to calculate the utility flowrates are given in the **2.6 Utility consumption determination** part. All the operating conditions required to define the process are summarized in this part. The data in green are initial values (*i.e.* modified by the simulation):

✓ Flue gas

	<i>Flue gas</i>
CO ₂ mass fraction	0.059
H ₂ O mass fraction	0.043
N ₂ mass fraction	0.898
Total mass flowrate (t/h)	3073
Temperature (°C)	100
Pressure (kPa)	101

✓ Water make-up

	<i>Make-up water</i>
H ₂ O mass fraction	1
Total mass flowrate (t/h)	100
Temperature (°C)	15
Pressure (kPa)	301

✓ Amine make-up

	<i>Make-up amine</i>
MEA mass fraction	1
Total mass flowrate (t/h)	1
Temperature (°C)	15
Pressure (kPa)	301

- ✓ Cold utilities (CU) and hot utility (HU)

	<i>DCC CU cooler</i> <i>CU-5</i>	<i>Desorber condenser</i> <i>CU-7</i>	<i>Water condenser</i> <i>CU-9</i>	<i>Lean amine cooler</i> <i>CU-11</i>	<i>Desorber reboiler</i> <i>HU-1</i>
H₂O mass fraction	1	1	1	1	1
Total mass flow rate (t/h)	10 000	1 000	1 500	3 000	1 000
Pressure (kPa)	101	101	101	101	500
Temperature (°C)	15	15	15	15	160

- ✓ Columns

<i>Operating parameters</i>	<i>Absorber</i>	<i>Desorber</i>
Column type	Absorber	2-phase distillation column with partial condenser
Number of theoretical stages	5	12
Feed stage	-	2
Vapor distillate flow rate (t/h)	-	189.2
Molar reflux ratio	-	0.4
Reboiler heat duty (kcal/h)	-	Calculated
Column head pressure (kPa)	106	200
Column bottom pressure (kPa)	121	200
Stages efficiency	0.48	0.5*

*: except for the condenser which efficiency is 1

Desorber further specifications:

Specification	<i>Product type</i>	<i>Compound</i>	<i>Value</i>	<i>Type</i>	<i>Action</i>
1: Partial flowrate	Vapor distillate	CO ₂	154.47 t/h	Mass	Vapor distillate flowrate

To assure the desorber convergence, the maximum damping factor (that can be changed in the numerical parameters in the "Further specifications" tab) has been set to 0.5. The other numerical parameters are the default ones.

✓ Separators

<i>Operating parameters</i>	<i>Direct Contact Cooler DCC</i>	<i>Water separator</i>
Separator type	Liquid-vapor separator	Liquid-vapor separator
Pressure (kPa)	121	The lowest of the feed streams
Pressure drop (kPa)	0	0
Heat duty (kcal/h)	Adiabatic	Adiabatic

✓ Generalized heat exchangers

<i>Name</i>	<i>Type</i>	<i>Specification type</i>	<i>Specification value</i>	<i>Pressure drop (kPa)</i>	
				<i>1st stream</i>	<i>2nd stream</i>
DCC CU cooler	Counter current or multipasses	Hot stream outlet temperature	30°C	179	0
Lean / rich amine heat exchanger	Counter current or multipasses	Minimal internal temperature approach	10°C	300	100
Lean amine exchanger	Counter current or multipasses	Hot stream outlet temperature	40°C	49	0
Water condenser	Counter current or multipasses	Hot stream outlet temperature	40°C	0	0

✓ Other heat exchangers

<i>Name</i>	<i>Type</i>	<i>Outlet temperature (°C)</i>	<i>Pressure drop (kPa)</i>
Reboiler	Cooler/Heater	Bubble temperature	0
Condenser	Simple heat exchanger	25	0

✓ Compressors

<i>Operating parameters</i>	<i>Transport fan</i>
Exhaust pressure (kPa)	121
Isentropic efficiency	0.8
Mechanical efficiency	1
Electrical efficiency	1

✓ Pumps

Operating parameters	Pump	Rich amine pump	Lean amine pump
Exhaust pressure (kPa)	301	750	700
Volumetric efficiency	0.75	0.75	0.75
Mechanical efficiency	1	1	1
Electrical efficiency	1	1	1

✓ Mixers

Operating parameters	Mixer
Outlet pressure (kPa)	150

✓ Pressure drops (expansion valves)

Operating parameters	Pressure drop 1	Pressure drop 2
Pressure drop (kPa)	200	299

✓ Stream splitters

Operating parameters	Stream splitter R1
CU-1 stream mass flowrate (t/h)	6500
Outlet pressure (kPa)	Equal to the feed pressure

✓ Generalized balance module: Make-ups determination

To determine the make-up flowrates, a "Balance" module has been used. The flowrates are determined from a simple material balance of the main input-output streams:

#	Remark	Type	From	To
18	Make up amine	Inlet	16-Make up amine	Mixer
17	Make up water	Inlet	17-Make up water	Mixer
3	Flue gas	Inlet	DCC	Absorber
4	Combustion gas discharge	Outlet	Absorbeur	4-Flue gas to atmosphere
9	Desorber top outlet	Outlet	Desorber	Water condenser

2.6. Utility consumption determination

The physical characteristics of the utility feeds are gathered in the corresponding table of the **2.5 Operating conditions** part.

Hot utility

The desorber reboiler has been simulated with a “Cooler/Heater” unit operation. Overheated water vapor at 160°C and 500 kPa is used. At the reboiler outlet, the temperature is set at the bubble temperature.

The following screenshot contains the configuration entered in the reboiler:

Cooler/Heater (\$TCON)

Name: Reboiler

Desc:

Identification Parameters Scripts Report Streams Notes

Outlet temperature
Equal to bubble point temperature

Temperature increment 0 K

☒ Utility
Edit the utility


Supplied heat duty 0 kcal/h

Pressure drop 0 atm

☒ Display temperature as a function of heat duty
Flash Type Flash (T - P)
Number of points to be calculated 10

OK Cancel

To determine the necessary hot utility flowrate, a “Constraints and recycles” module (“SPEC”) is used, as presented below:

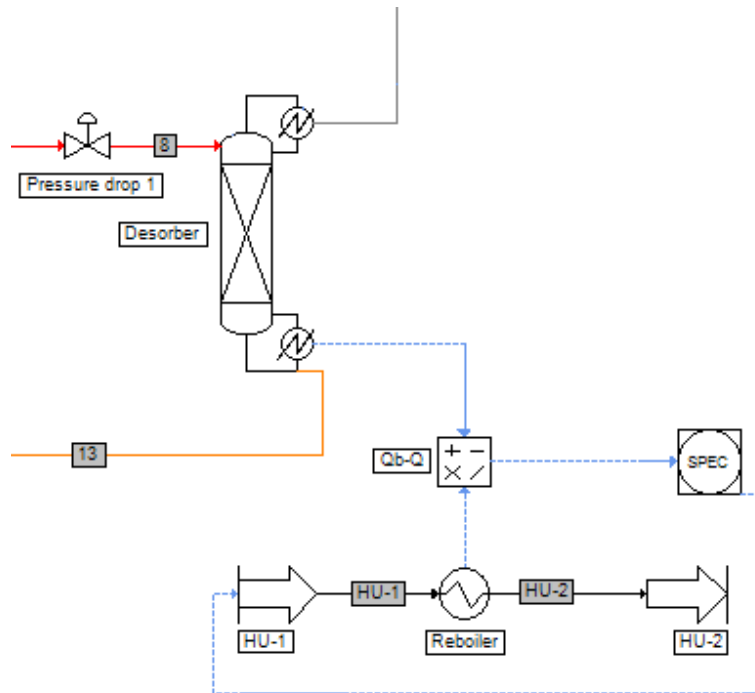

The approach is the following one: the heat duty values of the desorber reboiler and of the “Cooler/Heater” unit operation are sent to an “Information stream handler” module using information streams. The configuration of these information streams is presented below:

Information stream (\$ISTR16)

Name: Inf 16

Desc:

Identification Parameters Notes

Information type to be emitted:

☒ Boiler heat duty

Information vector to be emitted will be automatically determined depending on the parameters of "Desorber"

Start: 0 End: 0

Information type to be received:

☒ Input information stream value (In)

Information vector to be emitted will be automatically determined depending on the parameters of "Qb-Q"

Start: 0 End: 0

OK Cancel

Information stream (\$ISTR18)

Name: Inf 18

Desc:

Identification Parameters Notes

Information type to be emitted:

☒ Heat necessary to reach the specified temperature

Information vector to be emitted will be automatically determined depending on the parameters of "Reboiler"

Start: 0 End: 0

Information type to be received:

☒ Value of the additive factor (B)

Information vector to be emitted will be automatically determined depending on the parameters of "Qb-Q"

Start: 0 End: 0

OK Cancel

This information stream handler is used to calculate the difference between the boiler heat duty (In) and the heat duty (B) of the related “Cooler/Heater” unit operation.

The reboiler heat duty is positive and the related “Cooler/Heater” heat duty is negative. The information stream handler has then to be configured as follows:

Information stream handler (\$MANI1)

Name: Qb-Q

Desc:

Identification Parameters Scripts Report Streams Notes Act

$$Out = A * In^p + B - C$$

Value of A: 1

Value of B: 0

Value of C: 0

Power

☒ Real value: 1

☐ Integer value: 1

OK Cancel

The difference between the reboiler heat duty of the column and the one calculated in the related “Cooler/Heater” unit operation is then sent to the “SPEC” module. This “SPEC” module is linked to the hot utility feed unit operation by an information stream configured as follows:

Information stream (\$ISTR20)

Name: Inf 20

Desc:

Identification Parameters Notes

Information type to be emitted:

☒ Output information stream value (Out)

Information vector to be emitted will be automatically determined depending on the parameters of "Qb-Q"

Start: 0 End: 0

Information type to be received:

☒ Automatic

Information vector to be emitted will be automatically determined depending on the parameters of "Constraints and Recycles 3"


Start: 0 End: 0

OK Cancel

So the “SPEC” module will adjust the hot utility flowrate in order to cancel the difference between the heat duties. This way, the “Cooler/Heater” unit operation will represent the boiler and the calculated utility flowrate will correspond to the utility flowrate circulating in the reboiler.

Cold utilities:

The cold utility used in the process is water at 15°C and 101 kPa. The cold utility temperature at the exchanger outlet is set at 25°C. To do so, a “SPEC” module is also used, as illustrated below in the case of the lean amine cooler:

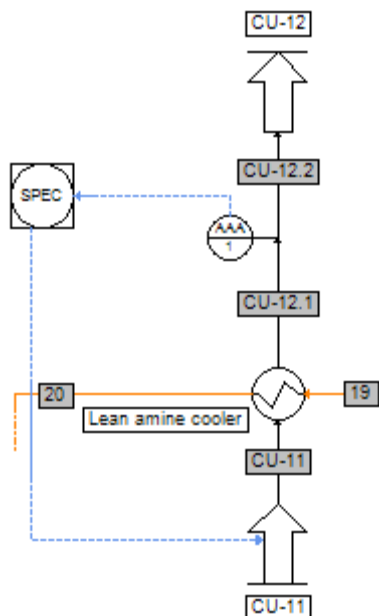

The “Measurement” module contains the set point for the utility outlet temperature and is configured as follows:

The information stream leaving the “measurement” module and entering in the “SPEC” module conveys the difference between the cold utility stream outlet temperature and the set point for temperature. The configuration of this information stream is then the following one:

The screenshot shows the 'Information stream (\$ISTR2)' dialog box. The 'Name' field is 'Inf 2'. The 'Desc' field is empty. The 'Parameters' tab is selected. Under 'Information type to be emitted:', the option 'Deviation between the measured value and the set ...' is selected. Below this, a text box states: 'Information vector to be emitted will be automatically determined depending on the parameters of "Measurement 5"'. The 'Start' and 'End' fields are both set to 0. Under 'Information type to be received:', the option 'Automatic' is selected. Below this, a text box states: 'Information vector to be emitted will be automatically determined depending on the parameters of "Constraints and Recycles 2"'. The 'Start' and 'End' fields are both set to 0. The 'OK' and 'Cancel' buttons are at the bottom right.

In order to adjust the cold utility flowrate to have the set point for temperature at the exchanger outlet, the “SPEC” module is linked to the cold utility feed unit operation with an information stream configured as follows:

The screenshot shows the 'Information stream (\$ISTR3)' dialog box. The 'Name' field is 'Inf 3'. The 'Desc' field is empty. The 'Parameters' tab is selected. Under 'Information type to be emitted:', the option 'Automatic' is selected. Below this, a text box states: 'Information vector to be emitted will be automatically determined depending on the parameters of "Constraints and Recycles 2"'. The 'Start' and 'End' fields are both set to 0. Under 'Information type to be received:', the option 'Stream total flowrate' is selected. Below this, a text box states: 'Information vector to be emitted will be automatically determined depending on the parameters of "CU-11"'. The 'Start' and 'End' fields are both set to 0. The 'OK' and 'Cancel' buttons are at the bottom right.

Remark: the condenser has been modeled with a simple heat exchanger. To make this exchanger representative of the condenser, the condenser heat duty value calculated in the desorber has to be sent to the simple heat exchanger. The exchanger requires a negative heat duty in the case of a heating (here cold utility heating) but the value obtained from the desorber is negative. An "Information stream handler" has then to be used and configured as follows to respect this sign rule:


The information streams leaving and entering the stream handler are configured as follows:

Entering stream:


Leaving stream:

2.7. Make-ups determination

The “Generalized balance” module allows to take measurements of several parameters and to calculate "Inlets - Outlets" balances. In this case, the partial flow rates of amine and water are used as follows:

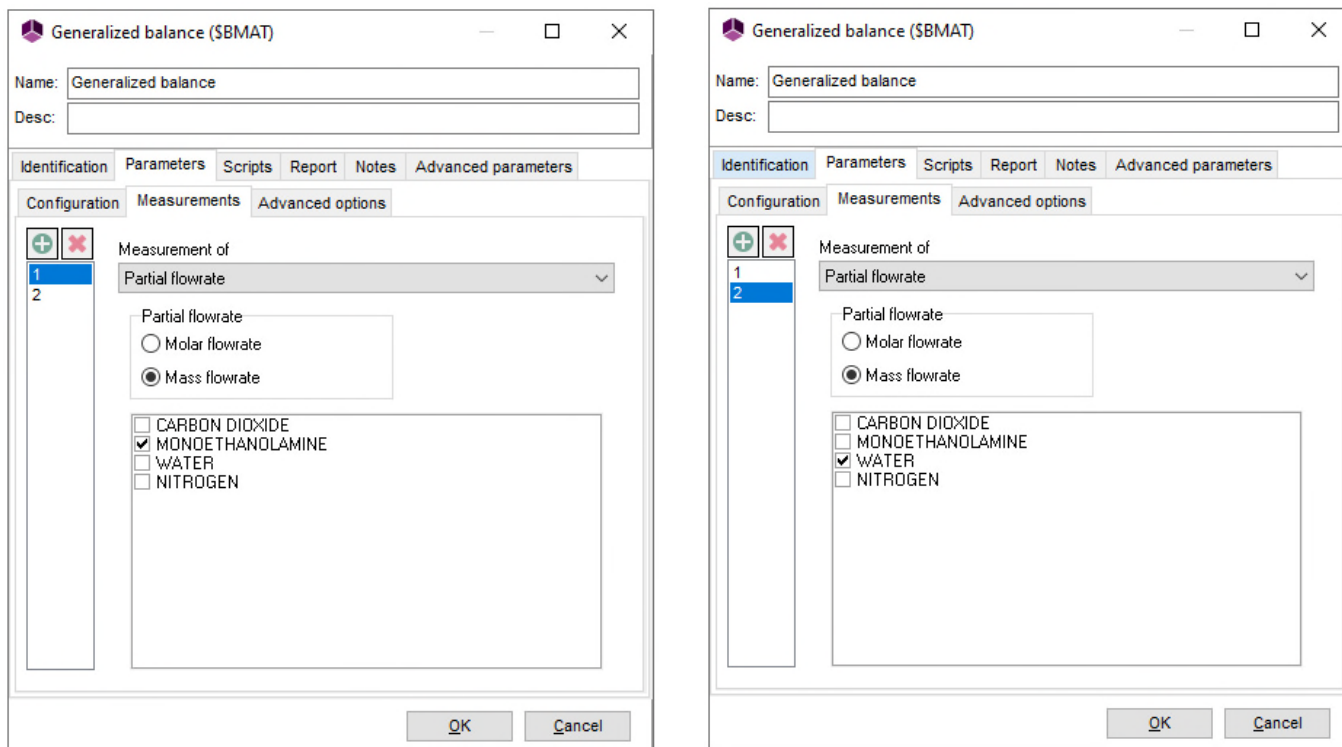

To determine the make-up flowrates, the use of a “SPEC” module is necessary as illustrated below:

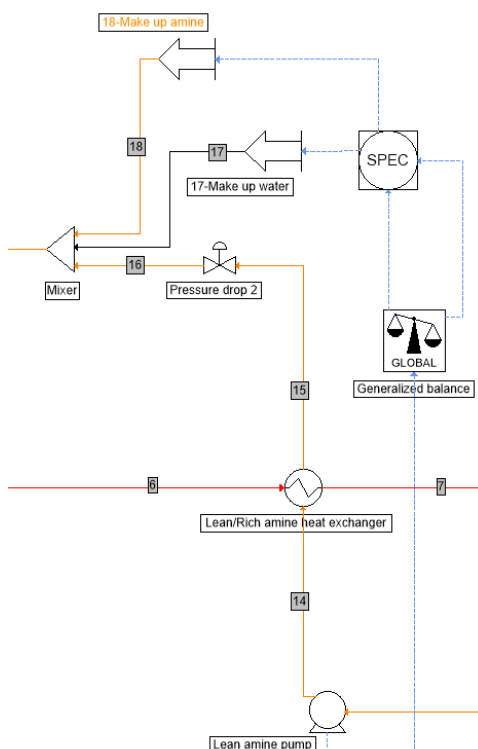

The approach is the following one: an information stream is connected between the last calculated module of the area of interest and the balance module. This action is important because it makes it possible to integrate the "Generalized balance" module into the calculation list and therefore can provide values as criteria and/or constraints.

As this information stream is only used to integrate the balance sheet module into the calculations, it is not necessary to transmit any particular information to the balance module. The following figure illustrates the configuration of this information flow:

Information stream (SISTR4)

Name: Inf 4

Desc:

Identification Parameters Notes

Information type to be emitted:

☒ No information transmitted

Information vector to be emitted will be automatically determined depending on the parameters of "Lean amine pump"

Start: 0 End: 0

Information type to be received:


☒ No information transmitted

Information vector to be emitted will be automatically determined depending on the parameters of "Generalized balance"


Start: 0 End: 0

OK Cancel

Remark: The calculation sequence can be found in the simulation report. To know the sequence used by default, just start the data verification as shown in the figure below:

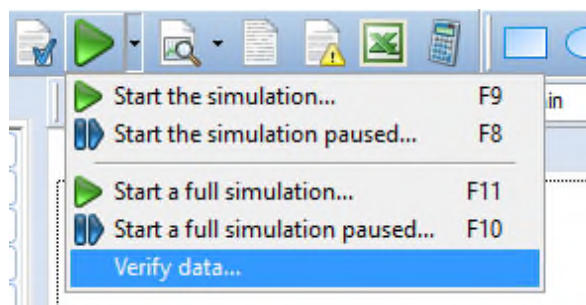

The following image shows the calculation sequence for this example (§ “Calculation sequence 1” of the simulation report):

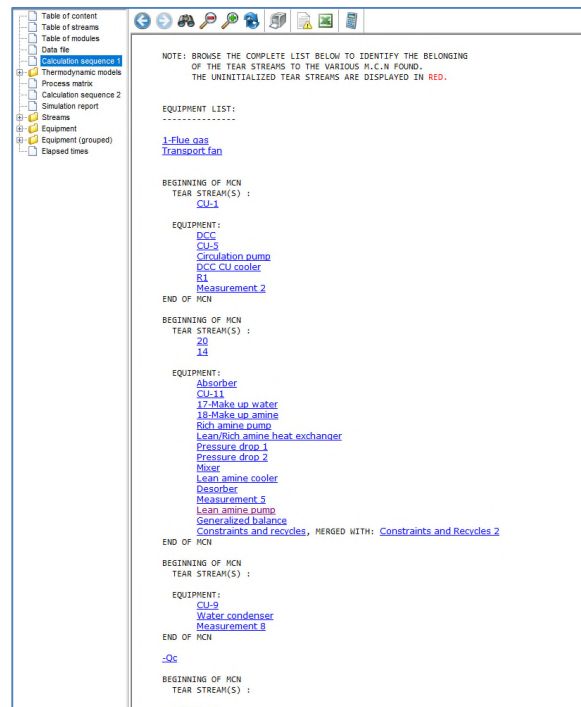

The “Balance” and the “SPEC” modules are connected with information streams. The Balance module will transmit information on the difference in the inlet-outlet balance of the partial flowrates for amine and for water. At the same time the “SPEC” module and the make-ups are connected to define the action variables.

Configuration of information streams (“Balance” to “SPEC”):

Amine balance:

Information stream (\$ISTR5)

Name: Inf 5

Desc:

Identification Parameters Notes

Information type to be emitted:

☒ Inlet-Outlet relative deviation for balance #1

Information vector to be emitted will be automatically determined depending on the parameters of "Generalized balance"

Start: 0 End: 0

Information type to be received:

☒ Automatic

Information vector to be emitted will be automatically determined depending on the parameters of "Constraints and recycles"

Start: 0 End: 0

OK Cancel

Water balance:

Information stream (\$ISTR6)

Name: Inf 6

Desc:

Identification Parameters Notes

Information type to be emitted:

☒ Inlet-Outlet relative deviation for balance #2

Information vector to be emitted will be automatically determined depending on the parameters of "Generalized balance"

Start: 0 End: 0

Information type to be received:

☒ Automatic

Information vector to be emitted will be automatically determined depending on the parameters of "Constraints and recycles"

Start: 0 End: 0

OK Cancel

Configuration of information streams from the “SPEC” module to the make-ups “Feed” modules:

To amine make-up:

Information stream (\$ISTR7)

Name: Inf 7

Desc:

Identification Parameters Notes

Information type to be emitted:

☒ Automatic

Information vector to be emitted will be automatically determined depending on the parameters of "Constraints and recycles"

Start: 0 End: 0

Information type to be received:

☒ Stream total flowrate

Information vector to be emitted will be automatically determined depending on the parameters of "17-Make up water"

Start: 0 End: 0

OK Cancel

To water make-up:

Information stream (\$ISTR8)

Name: Inf 8

Desc:

Identification Parameters Notes

Information type to be emitted:

☒ Automatic

Information vector to be emitted will be automatically determined depending on the parameters of "Constraints and recycles"

Start: 0 End: 0

Information type to be received:

☒ Stream total flowrate

Information vector to be emitted will be automatically determined depending on the parameters of "18-Make up amine"

Start: 0 End: 0

OK Cancel

Thus, the “SPEC” module will adjust the make-up flowrates so that the deviation of each inlet-outlet balance is verified.

3. SIMULATION RESULTS

3.1. Comments on results

The calculation sequence (order of calculation of the unit operations) is automatically generated. The tear streams “CU-1”, “14” and “20” are initialized with the following characteristics:

	CU-1	14	20
CO ₂ mass fraction	0	0.055	0.055
MEA mass fraction	0	0.3	0.29
H ₂ O mass fraction	1	0.645	0.655
N ₂ mass fraction	0	0	0
Total mass flowrate (t/h)	6500	3500	3600
Temperature (°C)	25	115	40
Pressure (kPa)	101.325	700	101

3.2. Mass and energy balances

This document only presents the most relevant stream results. In ProSimPlus, mass and energy balances are provided for all streams. Results are also available at the unit operation level ("Report" tab in the configuration window).

Inlet/outlet stream (except utilities):

Streams		1	4	11	12	17	18	R-1
From		1-Flue gas	Absorber	Water separator	Water separator	17-Make up water	18-Make up amine	R1
To		Transport fan	4-Flue gas to atmosphere	11-Recovered CO2	12-Make up water	Mixer	Mixer	R-1
Partial flows (mass)		t/h	t/h	t/h	t/h	t/h	t/h	t/h
CARBON DIOXIDE		181.3	26.8	154.4	0.1	0	0	0
MONOETHANOLAMINE		0	0.8	0	0	0	1	0
WATER		132.1	208.5	2.5	29.9	118.0	0	9
NITROGEN		2759.6	2759.5	0	0	0	0	0
Total flow (mass)	t/h	3073.0	2995.7	156.9	29.9	118.0	0.8	9.3
Mass fractions							0	0
CARBON DIOXIDE		0.059	0.009	0.984	0.002	0	0	0
MONOETHANOLAMINE		0	3E-04	0	6E-05	0	1	0
WATER		0.043	0.070	0.016	0.998	1	0	1
NITROGEN		0.898	0.921	2E-04	8E-09	0	0	0
Physical state		Vapor	Vapor	Vapor	Liquid	Liquid	Liquid	Liquid
Temperature	°C	100	46	40	40	15	15	30
Pressure	kPa	101	106	200	200	301	301	122
Enthalpic flow	MW	-874.9	-825.6	-392.3	-132.0	-524.8	-1.0	-41.3
Molar vapor fraction		1	1	1	0	0	0	0


Inlet/outlet stream (utilities):


Streams		CU-5	CU-6.2	CU-7	CU-8.2	CU-9	CU-10.1
From		CU-5	Measurement 2	CU-7	Measurement 7	CU-9	Water condenser
To		DCC CU cooler	CU-6	Condenser	CU-8	Water condenser	Measurement 8
Partial flows (mass)		t/h	t/h	t/h	t/h	t/h	t/h
WATER		7 207.8	7 207.8	2 233.1	2 233.1	2 011.2	2 011.2
Total flow (mass)	t/h	7207.8	7207.8	2233.1	2233.1	2011.2	2011.2
Mass fractions							
WATER		1	1	1	1	1	1
Physical state		Liquid	Liquid	Liquid	Liquid	Liquid	Liquid
Temperature	°C	15.0	25.0	15.0	25.0	15.0	25.0
Pressure	kPa	101	101	101	101	101	101
Enthalpic flow	MW	-4 974	-4 891	-1 541	-1 515	-1 388	-1 365
Molar vapor fraction		0	0	0	0	0	0

Streams		CU-11	CU-12.2	HU-1	HU-2
From		CU-11	Measurement 5	HU-1	Reboiler
To		Lean amine cooler	CU-12	Reboiler	HU-2
Partial flows (mass)		t/h	t/h	t/h	t/h
WATER		4 508.6	4 508.6	288.8	288.8
Total flow (mass)	t/h	4508.6	4508.6	288.8	288.8
Mass fractions					
WATER		1	1	1	1
Physical state		Liquid	Liquid	Vapor	Liquid
Temperature	°C	15.0	25.0	160.0	151.9
Pressure	kPa	101	101	500	500
Enthalpic flow	MW	-3 111	-3 059	18	-153
Molar vapor fraction		0	0	1	0


3.3. Colum profiles

Columns profiles can be accessed after the simulation in each column configuration window, in the “Profiles” tab. Double clicking on a profile will generate the corresponding graph. It is important to note that, in ProSimPlus, the first stage corresponds to the top stage and the last stage to the bottom stage (respectively the condenser and the reboiler in the case of a distillation column).

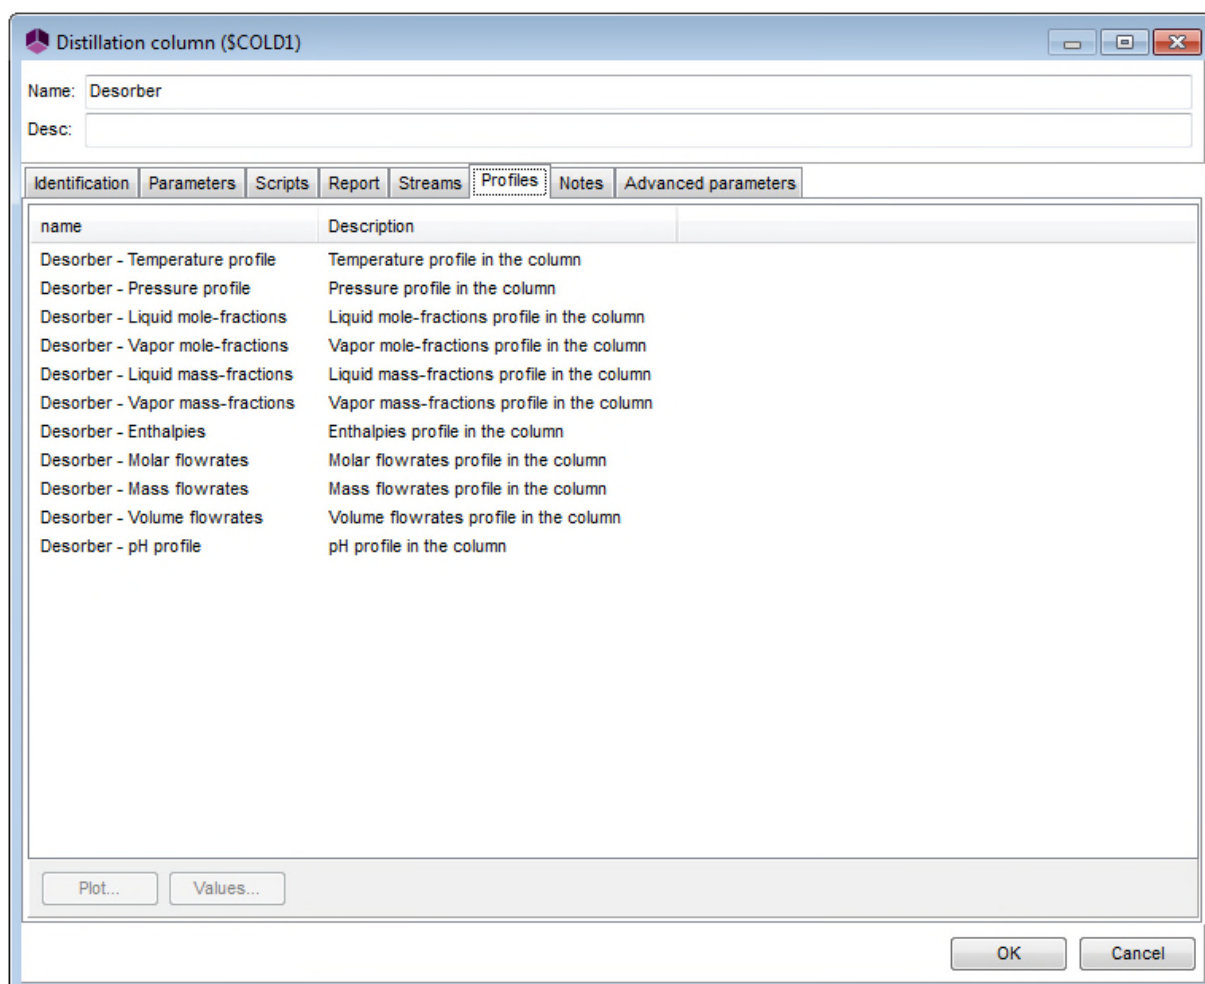


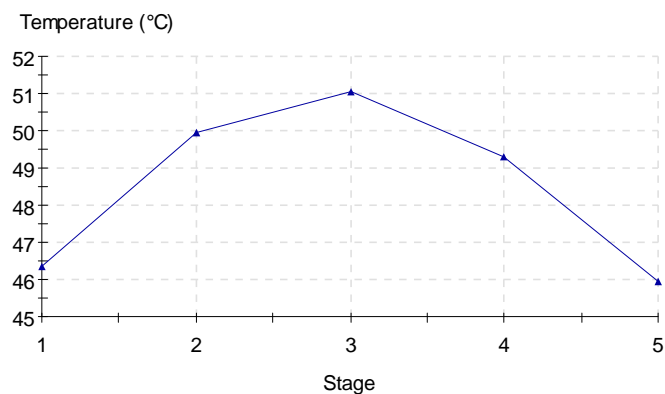Absorber**Absorber - Temperature profile**


Temperature profile in the column

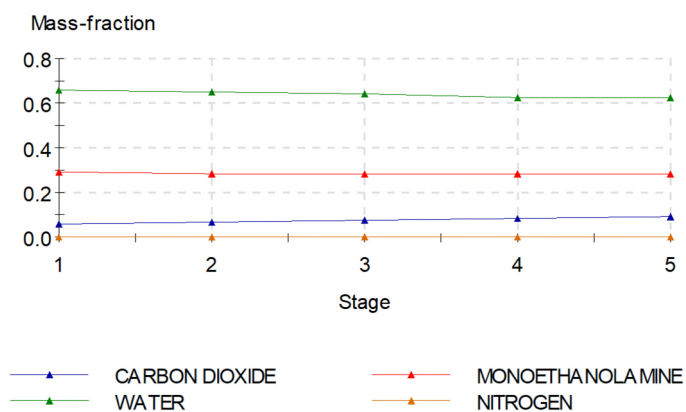Absorber - Liquid mass-fractions


Liquid mass-fractions profile in the column

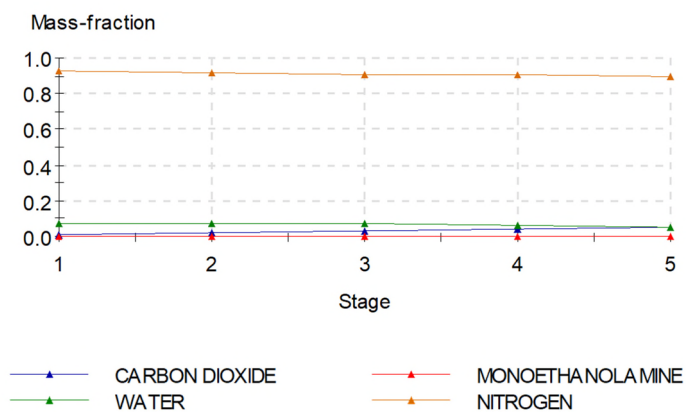Absorber - Vapor mass-fractions


Vapor mass-fractions profile in the column

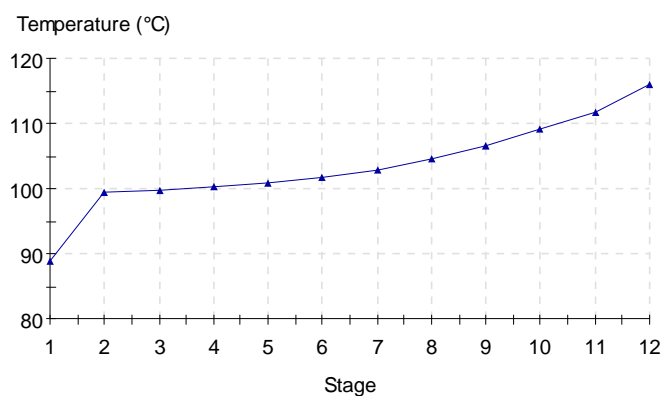Desorber**Desorber - Temperature profile**

Temperature profile in the column

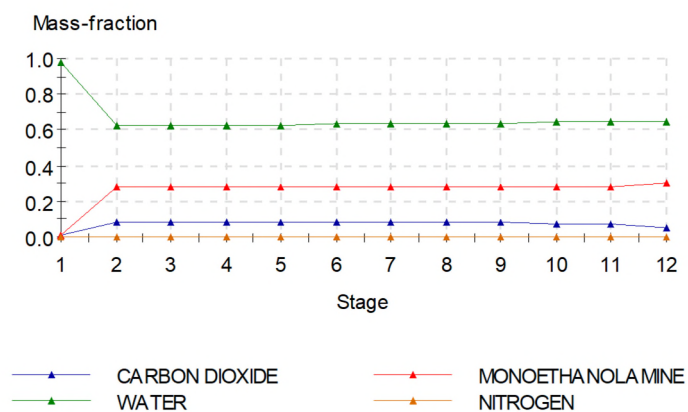Desorber - Liquid mass-fractions

Liquid mass-fractions profile in the column

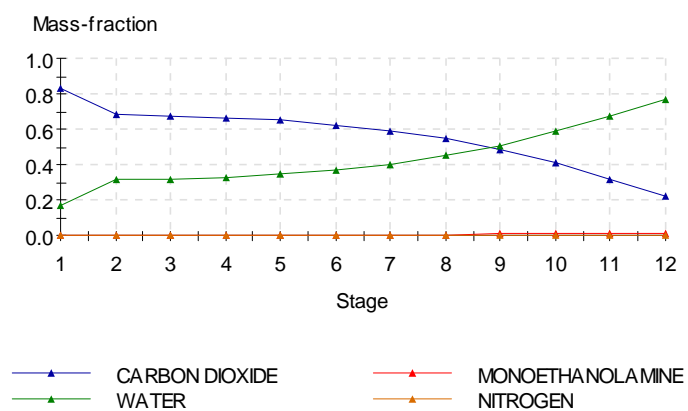Desorber - Vapor mass-fractions

Vapor mass-fractions profile in the column

4. REFERENCES

- [DES81] R.D. DESHMUKH, A.E. MATHER
“A Mathematical Model for Equilibrium Solubility of Hydrogen Sulfide and Carbon Dioxide in Aqueous Alkanolamine Solutions”
Chem. Eng. Sci, 36, pp 355-362 (1981)
- [KAL10] O. B. KALLEVIK
“Cost estimation of CO₂ removal in HYSYS”
Master’s Thesis (2010)
- [WEI93] WEILAND Ralph H., Tanmoy CHAKRAVARTY and Alan E. MATHER
“Solubility of Carbon Dioxide and Hydrogen Sulfide in Aqueous Alkanolamines”
Ind. Eng. Chem. Res., 32, pp 1419-1430 (1993)